


B&M Metals



www.custommetalroofing.com

Tuff-Rib Panel

Product Data

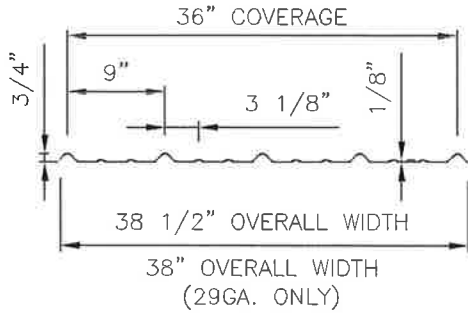

Tuff-Rib PANEL PROFILE

Applications

Exposed fastener wall/roof panel used on slopes down to 1:12. Tape sealant is required in seams (side-laps) on slopes 3:12 to 1:12. Standard panel lengths up to 50'.

Substrates

Plywood or Purlins.

Material

Standard - 29 GA. ASTM A792 (80 ksi steel) AZ55 - Bare
 AZ50 - Painted
 Optional - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
 AZ50 - Painted
 26 GA. ASTM A792 (50 ksi and 80 ksi steel) AZ55 - Bare
 AZ50 - Painted

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®
 Fluoropolymer (Kynar 500® PVDF resin-based)
 Siliconized Polyester

Panel Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

